

## KD3-N021M212i 2MP Network IR Motorized Eyeball Dome Camera



### DESCRIPTION

The KD3-N021M212i is one of Ultrakpa new series of professional network varifocal motorized dome cameras; it incorporates a 2MP 1/2.7-type CMOS image sensor providing smooth, full-HD1080p/30fps, outstanding crisply detailed vibrant images with extremely low noise making it ideal for professional video security and surveillance applications via various detection modes (video tampering, network disconnection, IP conflict, illegal access, no SD card, SD card full or error, security exception)

The KD3-N021M212i cameras support massive features such as motion detection, image flip, digital wide dynamic range, backlight compensation, highlight compensation, day and night (ICR), 3D digital noise reduction, privacy masking for 4 positions, smart IR for 40 meters distance in low luminance or totally dark environments ensuring that every detail is seen clearly

The KD3-N021M212i cameras provide high quality image with ultra low bit rate H.264 and H.265 video compressions; coming in weatherproof IP67 outdoor compact enclosure with 12V DC and POE operations

### MAIN APPLICATIONS

- Video Surveillance Applications in medium to large sized rooms, offices, meeting rooms and conference halls
- Indoor and Outdoor Applications thanks to the small size compact decorative design and the IP67 Ingress Protection

### MAIN FEATURES

- **2MP 1/2.7" CMOS sensor**
- **1920x1080p@25/30fps**
- **Day & Night (ICR)**
- **HLC, BLC**
- **Digital Noise Reduction (3D)**
- **Privacy Mask Function**
- **Support up to 256GB SD Card**
- **Various Detection Modes**
- **Varifocal Motorized Lens**
- **Digital Watermark**
- **Region of Interest**
- **H.264/H.265 Compressions**
- **Smart IR LED (40m)**
- **Image Flip**
- **12VDC/POE**
- **ONVIF Compliant**
- **IP67**

## KD3-N021M212i 2MP Network IR Varifocal Eyeball Dome Camera

### TECHNICAL SPECIFICATIONS

#### CAMERA

Image Sensor	1/2.7" 2MP Progressive CMOS Sensor		
Active Pixels	1920(H) x 1080(V) = 2.07M Pixels		
Frame Rate	Main Stream: 1080p@1fps-30/25fps Sub Stream: D1@1fps-30/25fps		
Min Illumination	0.008lux @F1.7		
IR Control	Manual/Auto		
IR Distance	40 meters (131.2ft)		
Pan/Tilt /Rotation	Horizontal 0°~355° Vertical 0°~78° Rotation 0°~360°		

#### LENS

Lens Type	Motorized Varifocal		
Focal Length	2.8-12mm		
Max. Aperture	F1.7		
Close Focus Distance	0.8m (2.6ft)		
Angle Of View	127°	106°	56°
D, H,V	38°	33°	19°

#### VIDEO

Video Compression	H.265, H.264, H.264H, H.264B, MJPEG		
Smart CODEC	Available		
Stream Capability	Dual Streaming		
Resolution	1080p(1920x1080), 1.3M(1280x960), 720P(1280x720), D1(704x576/480), VGA (640x480), CIF (352x288/240)		
Bit Rate Control	CBR/VBR		
Video Bit Rate	H.264: 32-6144Kbps, H.265: 12-7424Kbps		

#### CAMERA FUNCTIONS

Day & Night	Auto(ICR) / Color / B/W
WDR	DWDR
BLC	Available
HLC	Available
DNR	3D
Privacy Mask	Off / On (4 positions)
Gain Control	Manual/Auto
White Balance	Auto /Natural /Street Lamp / Outdoor / Manual Regional Custom
Motion Detection	Off / On (4 positions)
Region of Interest	Available (4 positions)
Electronic Shutter Speed	Auto/Manual 1/3~1/100000 sec
Smart IR	Available
Mirror	Available



Every effort has been made to ensure that all the information in this document was correct at the time of going to press. However we are constantly striving to improve our range wherever possible and therefore reserve the right to change the specification of any product without prior notice

R&D is constantly improving our products therefore specifications, features and appearance are subjected to change without notice

## ULTRAKPA

For USA, Canada, South America, Europe, Africa & Middle East - info@ultrakpa.com

#### NETWORK


Network	RJ-45 (10/100Base-T)
Users	Up to 6
Protocol	IPv4, IPv6, HTTP, HTTPS, TCP, UDP, ARP, RTP, RTSP, SMTP, FTP, DNS, NTP, Multicast
Browser	IE, Chrome, Firefox
Mobile Phone	IOS, Android
Compatibility	ONVIF (Profile S), CGI, P2P, Genetec

#### ENVIRONMENT

Storage	-40°C to +60°C, -40°F to 140°F
Operation	-30°C to +60°C, -22°F to 140°F
Humidity	80%RH (non condensing) less than 95%(non condensing)
Altitude	3000 meter maximum, 10,000 feet maximum

#### GENERAL

Power Source	DC12V /POE (802.3af)
Power Consumption	6.5W
Ingress Protection	IP67
Weight	0.63Kg

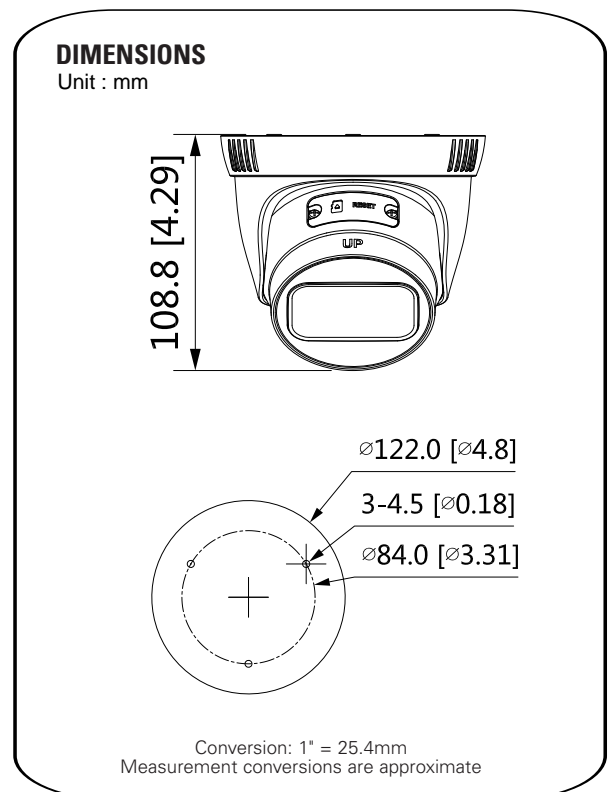

**ULTRAKPA Inc**

Astoria, NY 11103, U.S.A

Phone +1 (914) 210-1483 info@ultrakpa.com

www.Ultrakpa.com